


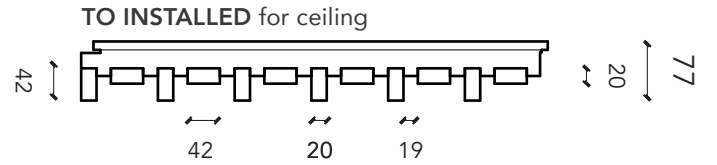
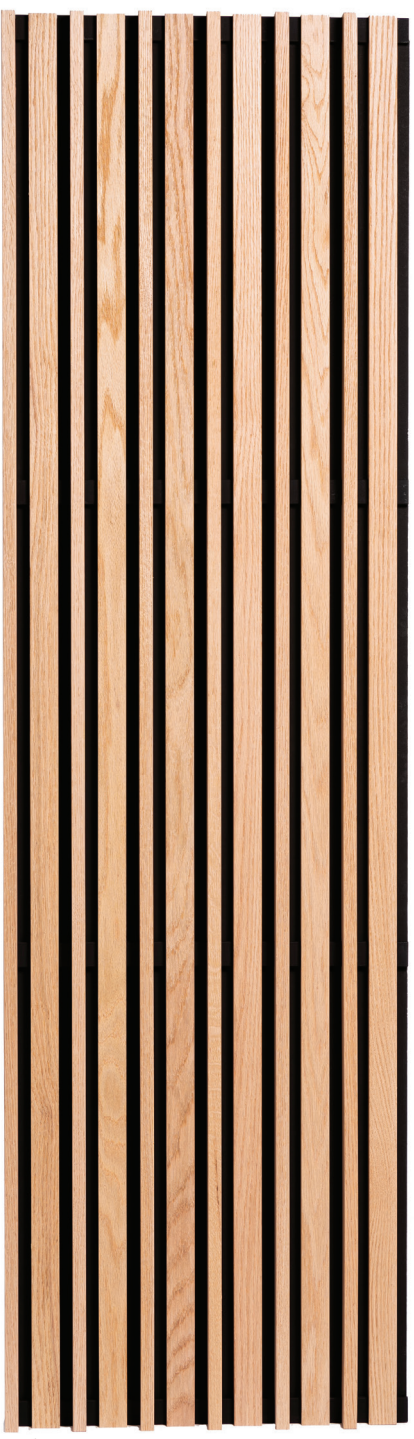


Linea 42 AL

LINEA RANGE
INTERIOR

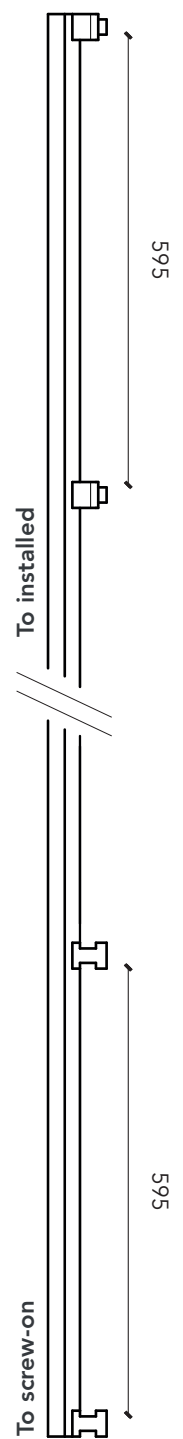

Module : 600 mm

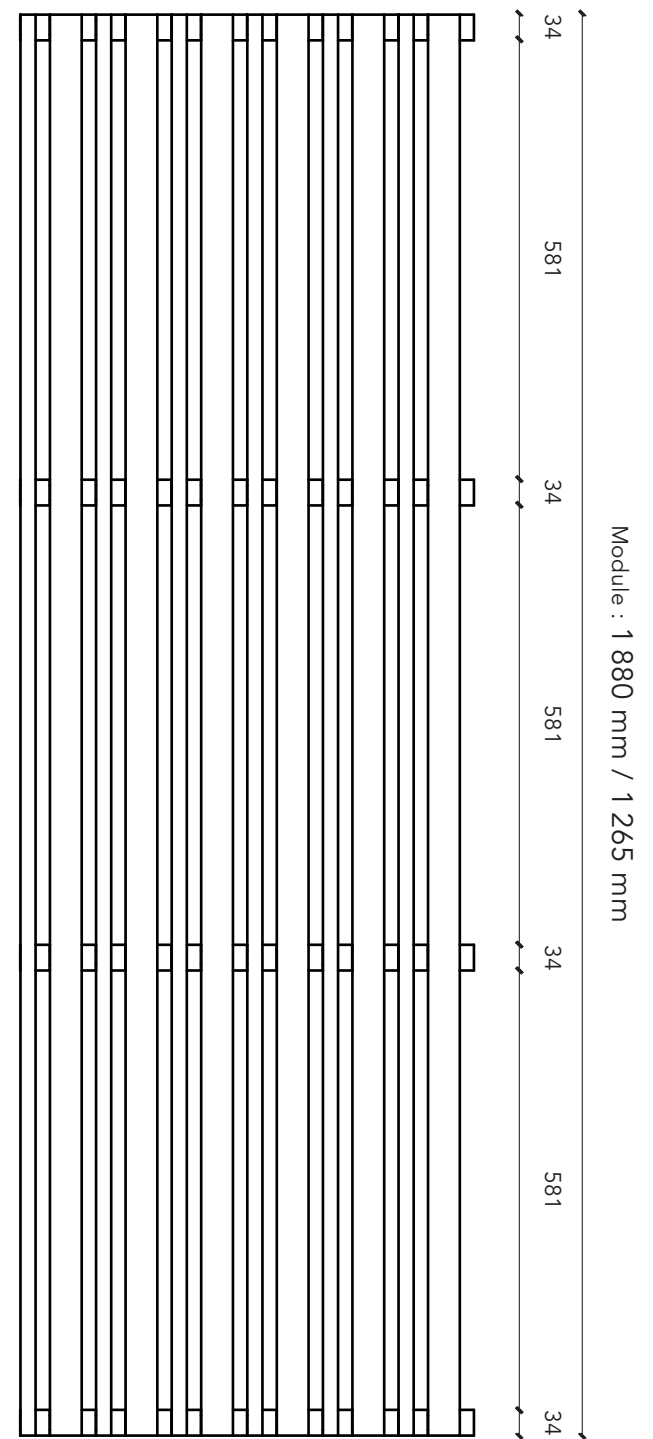



FINISH / REACTION TO FIRE (AS PER EN 13501-1)

Reaction to fire possibilities Euroclass B-s1,d0 or B-s2,d0 according to species and finishes.

ACOUSTIC RESULTS

The various data relating to acoustic absorption (α_p , α_w , absorption class) have been calculated according to ISO 11654 standard (LINEA + acoustic supplement).

TECHNICAL CHARACTERISTICS

Panel dimensions	1880 x 600 mm et 1265 x 600 mm
Cross-section of slats	42 mm (face) x 20 mm (height) ou 20 mm (face) x 42 mm (height)
Spacing between slats	19 mm
Centre distance of slats	50 mm
Black rear counter-slats	34 x 45 mm
Overall thickness	77 mm
Wood species	Pine
Surface mass (pine)	13,5 kg/m ²
Openness percentage	38%

Rear surface : acoustic mineral wool tiles 2,4 kg/m² surfaced with black fleece facing (format 600 x 600 mm; 20 or 22 mm thickness)
Not supplied by Laudescher

FITTING SYSTEM

Ceiling installation

To installed on T24 grid system
or by screwing :
– Selon NF EN 13964
– Selon DTU 58-1


Wall installation

Mechanical fixing by screwing:
– Selon DTU 36-2
– Selon NF EN 14915

CEILING INSTALLATION :

Linea 42 AL + LR 20mm on plenum E250mm

ACOUSTIC ABSORPTION COEFFICIENT

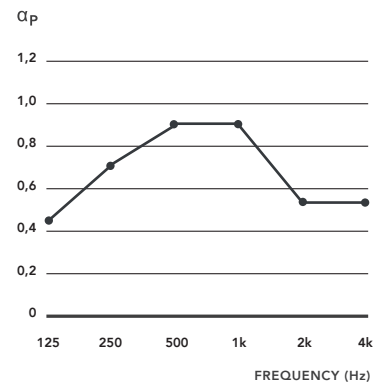


WEIGHTED INDEX :
 $\alpha_w = 0,65$

ABSORPTION CLASS :
Class C

WALL INSTALLATION :

Linea 42 AL + LR 20mm on plenum E50mm

ACOUSTIC ABSORPTION COEFFICIENT

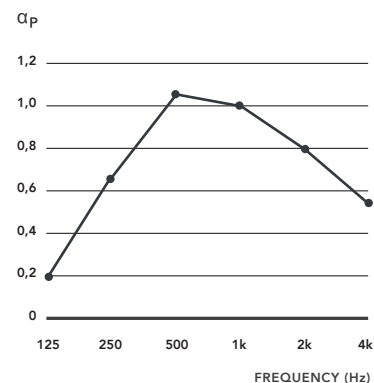

WEIGHTED INDEX :
 $\alpha_w = 0,75$

ABSORPTION CLASS :
Class C