

Laō<sup>®</sup>, innovation for fitters

Easier and faster to install and remove Patent pending system suitable for standard T24 grid systems Fitted from below

by a single operator with no need to access the plenum

















wood in genes

14 rue Marcel Laudescher 50500 Carentan-les-Marais FRANCE

info@laudescher.com T +33 (0)2 33 42 09 52

www.laudescher.com



de in France

THE MUST IN ACOUSTIC CEILING

Fastest to install and remove

LAUDESCHER



## Laō® by Laudescher



Finger jointed pine fire retardant varnish Euroclasse B-s2,d0

Natural

Pine timber autoclaved Natural Euroclass B-s1,d0 1200x600mm panels for suspended ceiling fitted on standard T24 grid system with 1200mm spacing between runners


T24 railings rendered invisible by the panels, ensuring a perfect alignment.

Fire reaction: Euroclass B-s1,d0 or B-s2,d0 depending on finish.

Allows for standard acoustic tiles, not included.



## Models

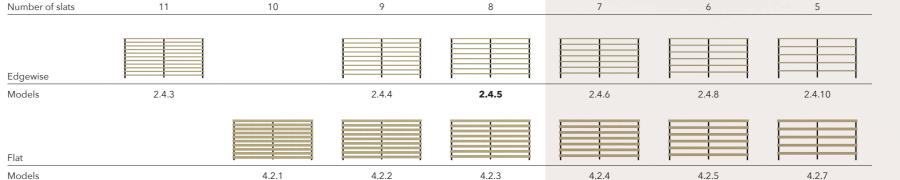

**2.4.5** model finger jointed pine Douglas Fir finish: available on stock

Other models and finishes : despatch within 4 weeks of order