

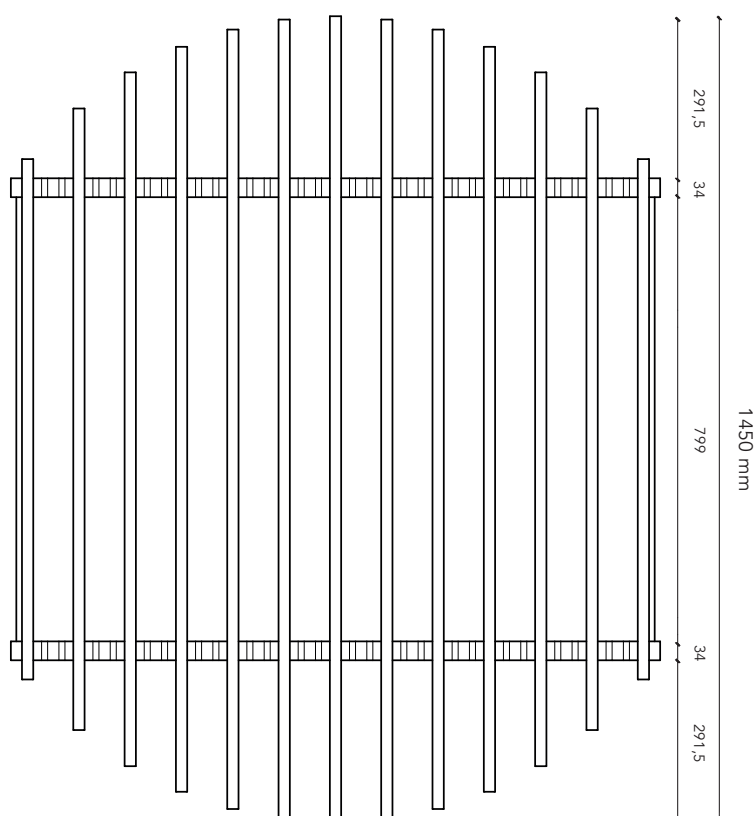
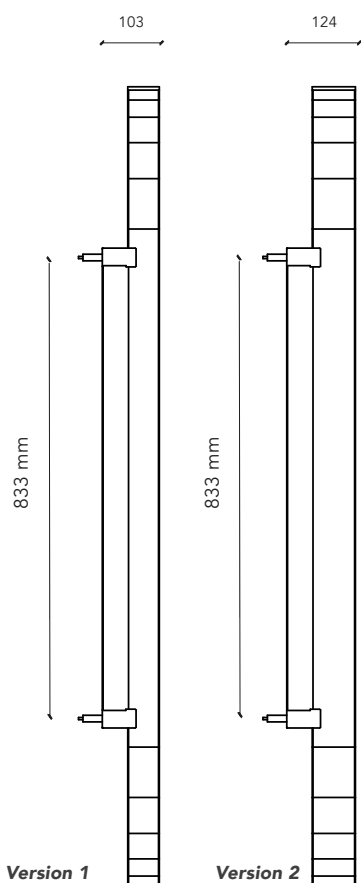


CANOPEA SUN

CANOPEA RANGE

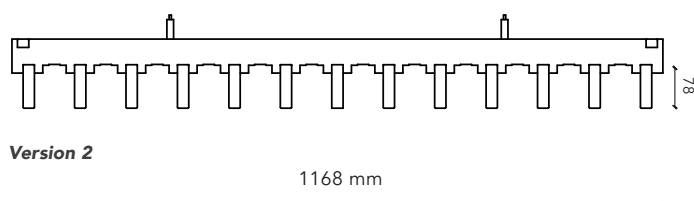


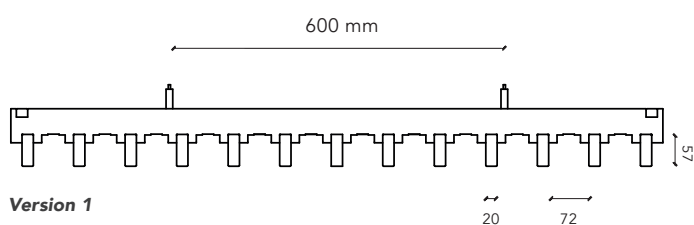

TECHNICAL CHARACTERISTICS

Dimensions	1450 x 1168 mm
Cross-section of slats	Version 1 : 20 mm (face) x 57 mm (height) Version 2 : 20 mm (face) x 78 mm (height)
Spacing between slats	72 mm
Centre distance of slats	92 mm
Black rear counter-slats	34 x 61 mm
Overall thickness	Version 1 : 103 mm Version 2 : 124 mm
Wood species	Pin, chêne, hêtre
Weight (pine)	Version 1 : Between 20,6 and 21,7 kg Version 2 : Between 25,5 and 26,6 kg
Weight (oak)	Version 1 : Between 21,6 and 22,7 kg Version 2 : Between 26,9 and 28,0 kg
Weight (beech)	Version 1 : Between 22,3 and 23,3 kg Version 2 : Between 27,8 and 28,9 kg

SUSPENSION ACCESSORIES - INCLUDED



Kit of 4 suspension cables (Cable block + 2m cable length, 1mm diameter + 180 degree sphere fixings)

FINISH / REACTION TO FIRE (AS PER NF P 92-501)

Fire reaction possibilities (M1)

ACOUSTIC SUPPLEMENT - CHOICE OF

Acoustic mineral wool tile



Eco friendly sound absorber made from seaweed




ACOUSTIC RESULTS

The various data relating to sound absorption have been tested in accordance with the recommendations of ISO 354.

CANOPEA SUN (SLATS 20 x 78 mm) + LR 44 mm

Suspended 30 cm under the structural ceiling


ACOUSTIC ABSORPTION COEFFICIENT

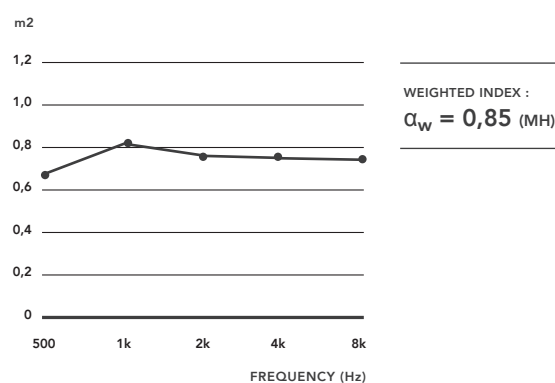

CANOPEA SUN (SLATS 20 x 78 mm) + ALGUES 35 mm

Suspended 30 cm under the structural ceiling

ACOUSTIC ABSORPTION COEFFICIENT

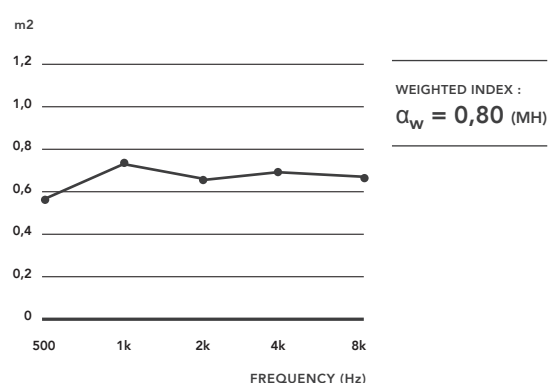

INTEGRATION OF LIGHTING - OPTION

Lighting is available as an option.