

---

# Linea 2.4.5 Lite

---



---

## For suspended ceiling:

- Panel **TO BE INSTALLED** on T24 frame
- Panel **TO BE SCREWED** onto metal or wooden frame

### INSTALLATION:

In accordance with NF EN 13964  
In accordance with DTU 58-1

---

## For wall cladding:

- Panel **TO BE SCREWED** onto metal or wooden frame

### INSTALLATION:

In accordance with NF EN 14915  
In accordance with DTU 36-2



## TECHNICAL SPECIFICATIONS

Panel dimensions	1,880 x 600 mm
Slat cross-section	20 mm (front) x 42 mm (height)
Slat spacing	55 mm
Centre distance of slats:	75 mm
Black rear counter-slats	34 x 45 mm
Total thickness	69 mm
Timber species	Silver fir, pine, oak
Area density, silver fir	6 kg/m <sup>2</sup>
Area density, pine	6.8 kg/m <sup>2</sup>
Area density, oak	8 kg/m <sup>2</sup>
Openness percentage	80%

Back: rigid acoustic rockwool tiles (2.4 kg/m<sup>2</sup>), covered with black fleece finish (size: 600 x 600 mm; thickness: 20 or 22 mm).

*Not supplied by Laudescher.*

## REACTION TO FIRE (IN ACCORDANCE WITH EN 13501-1)

Fire-retardant, Euroclass standard B-s1, d0 or B-s2, d0 depending on the type of wood and finish.


## ACOUSTIC PERFORMANCE

Various items of sound absorption data ( $\alpha_p$ ,  $\alpha_w$ , absorption class) have been calculated in accordance with standard ISO 11654 (Linea + acoustic complement).

### LINEA 2.4.5 LITE CEILING

+ 20 mm rockwool on E250mm plenum

#### ACOUSTIC ABSORPTION RATING

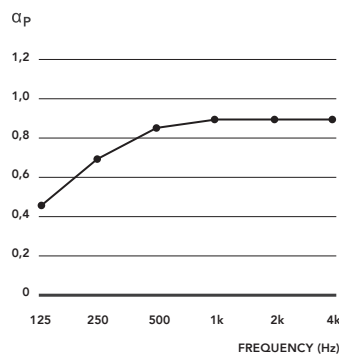


WEIGHTED INDEX:  
 $\alpha_w = 0.90$

ABSORPTION CLASS:  
**Class A**

### LINEA 2.4.5 LITE WALL

+ 20 mm rockwool on plenum E50mm

#### ACOUSTIC ABSORPTION RATING

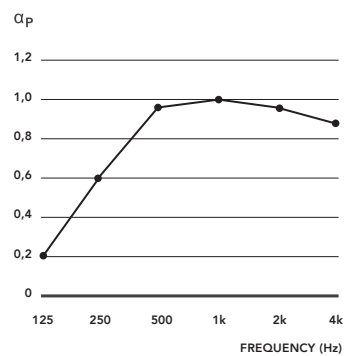


WEIGHTED INDEX:  
 $\alpha_w = 0.90$

ABSORPTION CLASS:  
**Class A**



#### TO BE INSTALLED



#### TO BE SCREWED ON

